



## Technical Data Sheet

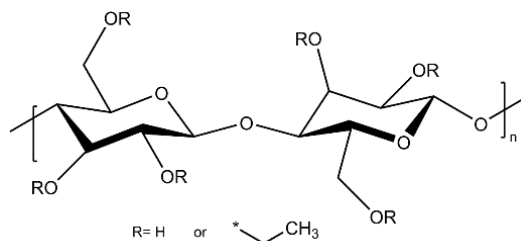
<b>MATERIAL:</b>	Ethyl cellulose
<b>CATALOG NUMBER:</b>	1061
<b>CAS NUMBER:</b>	9004-57-3
<b>DESCRIPTION:</b>	Ethyl ether of cellulose
<b>FORMULA:</b>	Unspecified

**TYPICAL PROPERTIES:**

Appearance:	Powder
Ethoxyl content:	50%
Degree of substitution:	2.5
Viscosity:	300 cp (5% solution in 80/20 toluene/ethanol @ 25°C)
Refractive index:	$n_D^{20}$ 1.47
Density:	1.14
Glass transition temp:	43°C
Flash point:	>300°F
Softening point:	157°C
Solubility:	Benzene, carbon tetrachloride, ethylene dichloride, methylene chloride, toluene, xylene

**GENERAL INFORMATION:**

Prepared from alkali cellulose and ethyl chloride. Ethyl cellulose can be melt processed and finds use in applications such as paper and textile coatings, gel lacquers, strippable coatings and injection molded parts such as refrigerator bases and ice-crusher parts.

**STRUCTURE:**

Technical information and data regarding the composition, properties or use of the products described herein is believed reliable. However, no representation or warranty is made with respect thereto except as made by Sp<sup>2</sup> in writing at time of sale. Sp<sup>2</sup> cannot assume responsibility for any patent liability which may arise from the use of any product in a process, manner or formula not designed by Sp<sup>2</sup>.