



Technical Data Sheet

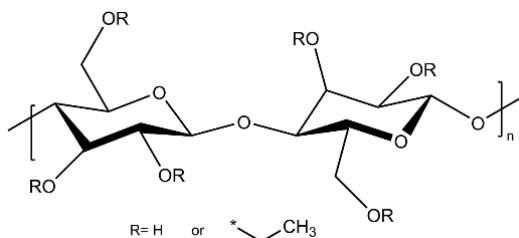
MATERIAL:	Ethyl cellulose
CATALOG NUMBER:	461
CAS NUMBER:	9004-57-3
DESCRIPTION:	Ethyl ether of cellulose
FORMULA:	Unspecified

TYPICAL PROPERTIES:

Appearance:	Powder
Ethoxyl content:	49%
Degree of substitution:	2.5
Viscosity:	100 cp (5% solution in 80/20 toluene/ethanol @ 25°C)
Refractive index:	n_D^{20} 1.47
Density:	1.14
Glass transition temp:	43°C
Flash point:	>300°F
Softening point:	157°C
Solubility:	Benzene, carbon tetrachloride, ethylene dichloride, methylene chloride, toluene, xylene

GENERAL INFORMATION:

Prepared from alkali cellulose and ethyl chloride. Ethyl cellulose can be melt processed and finds use in applications such as paper and textile coatings, gel lacquers, strippable coatings and injection molded parts such as refrigerator bases and ice-crusher parts.

STRUCTURE:

Technical information and data regarding the composition, properties or use of the products described herein is believed reliable. However, no representation or warranty is made with respect thereto except as made by Sp² in writing at time of sale. Sp² cannot assume responsibility for any patent liability which may arise from the use of any product in a process, manner or formula not designed by Sp².