



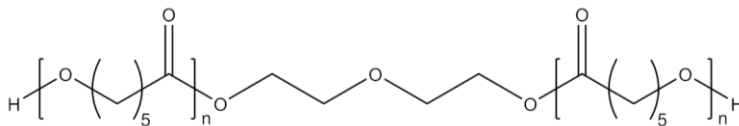
## Technical Data Sheet

<b>MATERIAL:</b>	Poly(caprolactone) diol
<b>CATALOG NUMBER:</b>	505
<b>CAS NUMBER:</b>	36890-68-3
<b>DESCRIPTION:</b>	Dihydroxy terminated Poly(caprolactone)
<b>FORMULA:</b>	$(C_6H_{10}O_2)_n(C_4H_{10}O_3)(C_6H_{10}O_2)_n$

**TYPICAL PROPERTIES:**

Appearance:	Fused mass
Approx Mn:	830
Density:	1.08 (20°C)
Viscosity:	167cs (55°C)
Melting point:	40°C
Flash point:	560°F
Hydroxyl number:	135mg KOH/g
Solubility:	THF; Insoluble in water

**GENERAL INFORMATION:** Poly(caprolactone) diols undergo the usual reactions expected of primary alcohol functionality, including reaction with isocyanates, melamines or aminoplasts, and epoxides. Typical applications include use in polyurethanes for adhesives, sealants, coatings and elastomers, modifiers to flexibilize acrylic, polyester, vinyl and thermoset coatings, reactivated diluents to increase the solids content of solvent-based coatings and epoxy flexibilizers for coating and molding applications.

**STRUCTURE:**

Technical information and data regarding the composition, properties or use of the products described herein is believed reliable. However, no representation or warranty is made with respect thereto except as made by Sp<sup>2</sup> in writing at time of sale. Sp<sup>2</sup> cannot assume responsibility for any patent liability which may arise from the use of any product in a process, manner or formula not designed by Sp<sup>2</sup>.