



## Technical Data Sheet

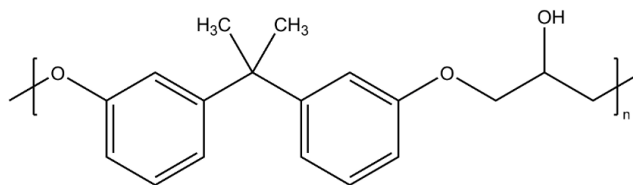
<b>MATERIAL:</b>	Phenoxy resin
<b>CATALOG NUMBER:</b>	045B
<b>CAS NUMBER:</b>	25068-38-6
<b>DESCRIPTION:</b>	Copolymer of bisphenol-A and epichlorohydrin
<b>FORMULA:</b>	$(C_{15}H_{14}O \cdot C_3H_6O_2)_x$

**TYPICAL PROPERTIES:**

Appearance:	Pellets
Approx Mw:	60,000 [GPC]
Density:	1.18 (23°C)
Softening point:	180°C
Tg:	100°C
Viscosity:	700cp (20% in cyclohexanone)
Solubility:	Cellosolve acetate, MEK, THF

**GENERAL INFORMATION:**

Phenoxy resin is a high molecular weight thermoplastic material supplied in the form of clear, cylindrical pellets. It is made of bisphenol-A and epichlorohydrin. Phenoxy resins are recommended for coating applications requiring excellent toughness, flexibility, adhesion and chemical resistance. Typical applications include: binders for zinc-rich primers for maintenance coatings on steel; shop-coat primers that may be welded without removing the coating; coating film, tape, etc.; coil coating primers adhering to many types of pretreated metals, for food containers as sole binder or with phenolics (have FDA acceptability); thermoset container coatings crosslinked with melamines and also with urethanes; phenoxy zinc dust pipe dopes; hot melt and solution applied adhesives.

**STRUCTURE:**

Technical information and data regarding the composition, properties or use of the products described herein is believed reliable. However, no representation or warranty is made with respect thereto except as made by Sp<sup>2</sup> in writing at time of sale. Sp<sup>2</sup> cannot assume responsibility for any patent liability which may arise from the use of any product in a process, manner or formula not designed by Sp<sup>2</sup>.